


**COIN COLLECTORS — PREPAY**  
**176 CS, GS; CT, GT**  
**COMMON BATTERY — CONNECTIONS**

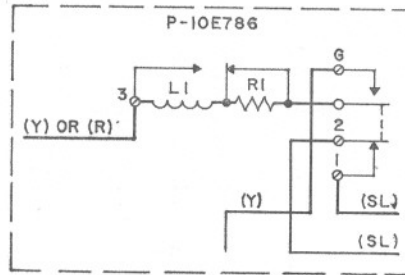

**Note 1:** 176CT, GT coin collectors are equipped with P-10E786 coin relays wired as shown above.

**Note 2:** In some upper housings, transfer contacts may be designated W, BB, YY, BK-YY, Y, and X, respectively.

**Note 3:** Brown gong signal lead or black filter lead may be connected to X terminal on coin chute instead of No. 5 terminal.

**Note 4:** Dotted lines in diagram show manual set connections.

**Note 5:** When a 61R filter is required for radio frequency suppression, move yellow dial lead from Y upper housing contact spring to filter bracket terminal and connect filter leads as follows:


Yellow lead to filter bracket terminal.

Black lead to No. 5 upper housing contact.

Red lead to Y upper housing contact.

LOWER HOUSING

UPPER HOUSING

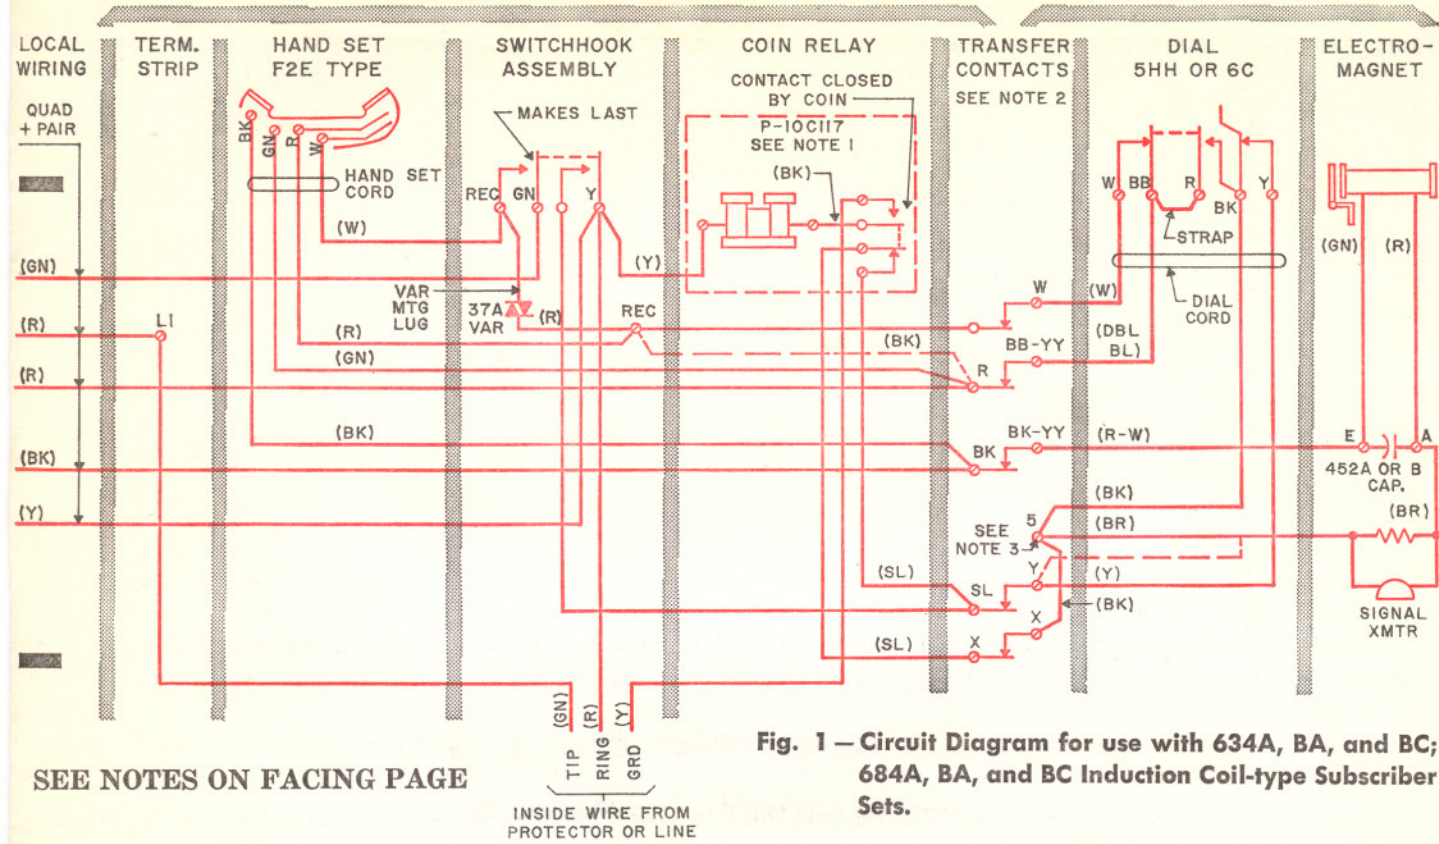


SEE NOTES ON FACING PAGE

Fig. 1 - Circuit Diagram for use with 634A, BA, and BC; 684A, BA, and BC Induction Coil-type Subscriber Sets.

LOWER HOUSING

UPPER HOUSING

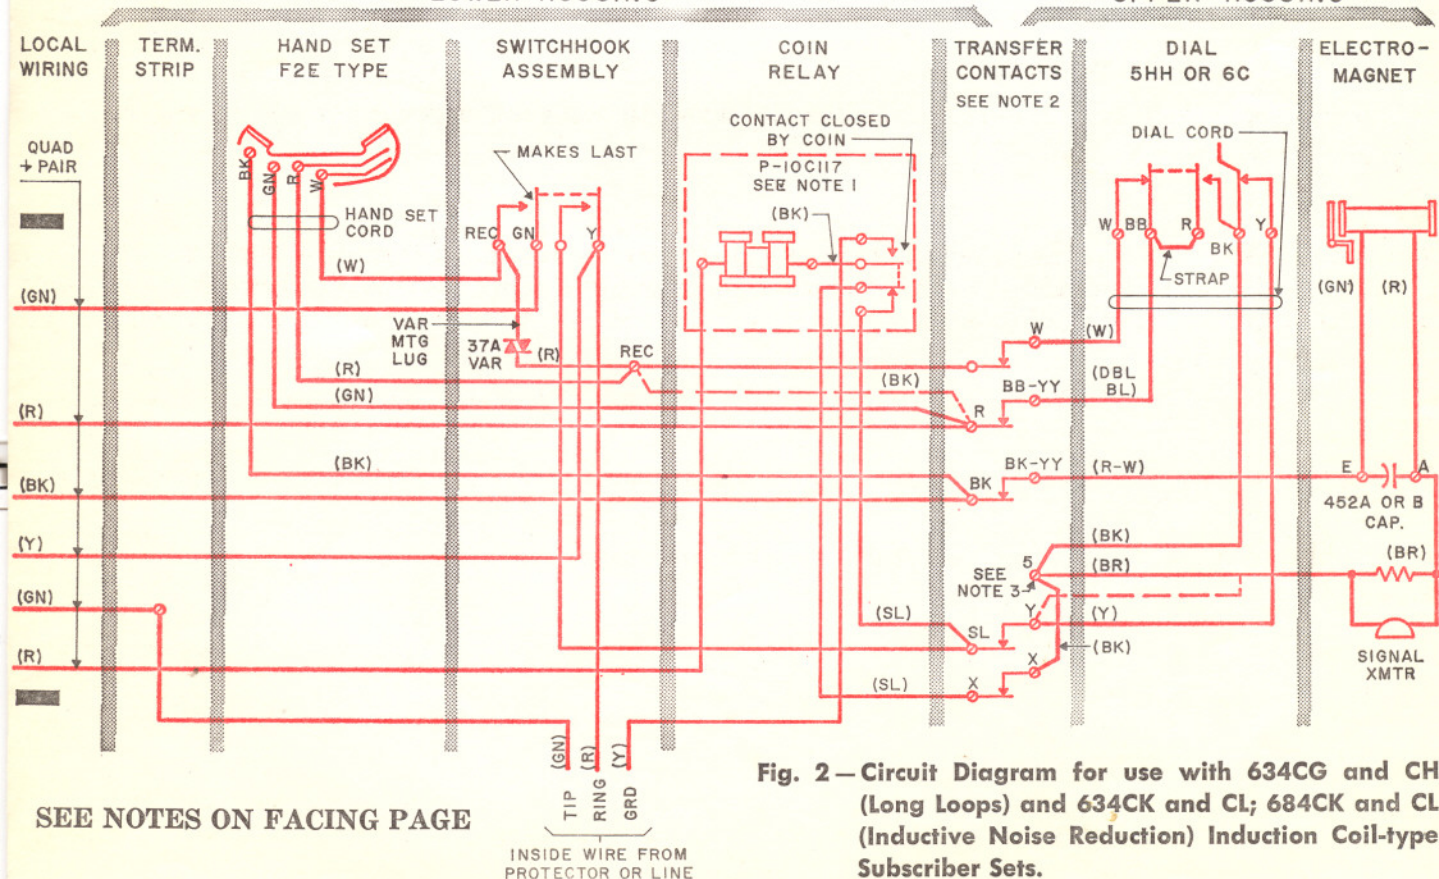

SEE NOTES ON FACING PAGE

Fig. 2 - Circuit Diagram for use with 634CG and CH (Long Loops) and 634CK and CL; 684CK and CL (Inductive Noise Reduction) Induction Coil-type Subscriber Sets.